

REVISION DATA




REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-05-04

Technical Data

Material:
 Pin: Brass, machined CuZn38Pb2
 Plating:
 Tin plated: 2µm/80µ"Ni, 5µm/200µ"Sn
 Gold Plated: 2µm/80µ"nickelfull gold
 Insulator black(housing): PBT (UL94V-0)

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: ≤4mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Operating voltage: 60VAC/DC

Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +220°C, 10s max

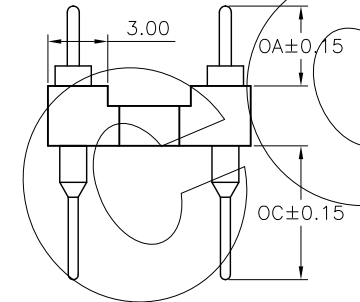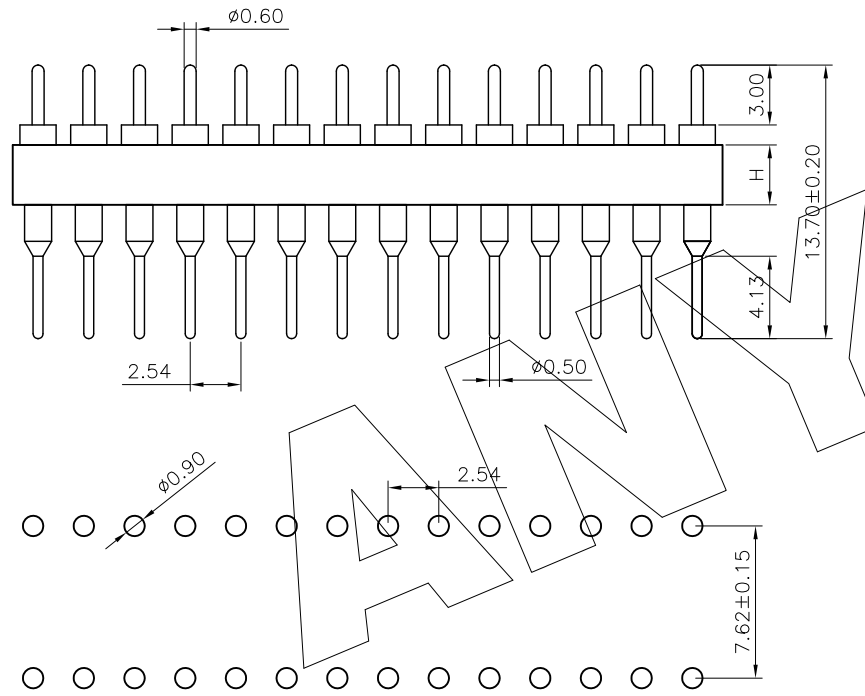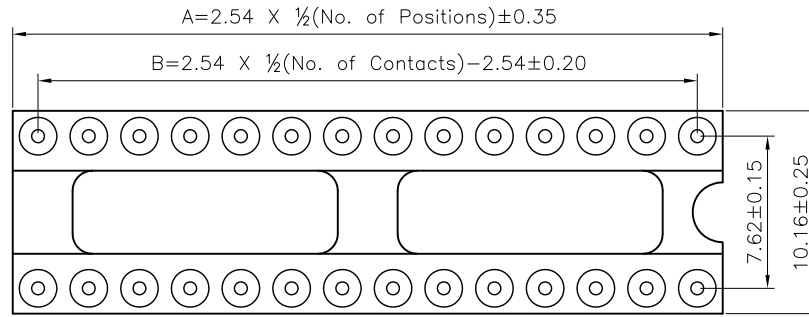

No. of Positions	DIM"A"	DIM"B"	TYPE
6	7.62	5.08	无 横
8	10.16	7.62	
10	12.70	10.16	
14	17.78	15.24	
16	20.32	17.78	
18	22.86	20.32	
20	25.40	22.86	带 横
24	30.48	27.94	
28	35.56	33.02	
32	40.64	38.10	
40	50.80	48.26	
48	60.96	58.42	

P.C.B LAYOUT

PA	D	XXX	3	7	X	X	XX	1370A	R	00
Angel Options D 180°直插 R 90°折弯 S SMT H 卧式贴片 A 单排SMT 第1Pin朝下 B 单排SMT 第1Pin朝上	No. of Positions XXX Positions	Dip Spacing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	Insulator Height 0 No 1 1.20 mm 2 1.90 mm 3 2.00 mm 4 2.10 mm 5 2.20 mm 6 2.80 mm 7 3.00 mm 8 3.80 mm 9 4.10 mm A 4.20 mm B 7.00 mm S Special	Insulator type A PBT单排 B PBT双排 C PBT中空 D PBT带杠 E PPS单排 F PPS双排 G PPS中空 H PPS带杠 I PA48单排 J PA48双排 K PA48三排 L PA68单排 M LCP四排	Pin Plated 0 No 1 Tin120µ" 锡 2 Tin200µ" 锡 3 Gold60µ" 金 4 Gold80µ" 金 5 Gold1µ" 金 6 Gold1.5µ" 金 7 Gold2µ" 金 8 Gold3µ" 金 9 Gold5µ" 金 A Gold8µ" 金 B Gold10µ" 金 C Gold15µ" 金 D Gold30µ" 金 E Ag plated F Nickel80µ" 金	Clip plated 0 No 1 Tin120µ" 锡 2 Tin200µ" 锡 3 Gold60µ" 金 4 Gold80µ" 金 5 Gold1µ" 金 6 Gold1.5µ" 金 7 Gold2µ" 金 8 Gold3µ" 金 9 Gold5µ" 金 A Gold8µ" 金 B Gold10µ" 金 C Gold15µ" 金 D Gold30µ" 金 E Ag plated F Nickel80µ" 金	Pin length(mm) 1370A 13.7mm S Special	Insulator Option 0 No D 直角塑胶 R 圆角塑胶 S 小孔塑胶	Series 00 NO	

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: 2.54mmPitch IC Sockets Straight DIP Spacing 7.62mm Pin Length 13.7mm
ANGLE ±5°	DATE :	2010-05-04	PART NO: PADXXX37XXXX1370AR00
X.XXX ±0.10	DRAWN :	LiKui	DRAWING NO: EP-PAD-146
X.XX ±0.20	CHECKED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X.X ±0.30	APPROVED :		
X. ±0.50			