
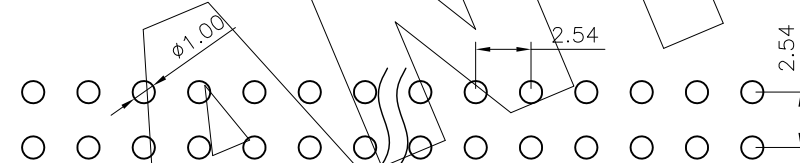
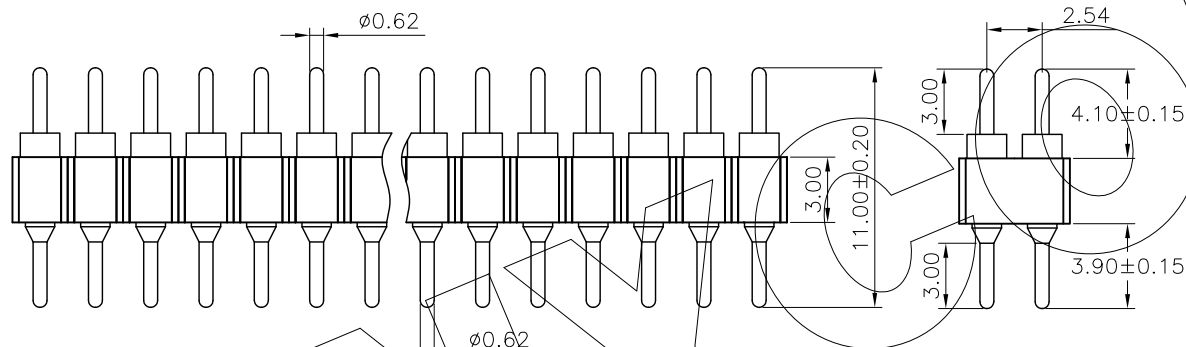


REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-04-07

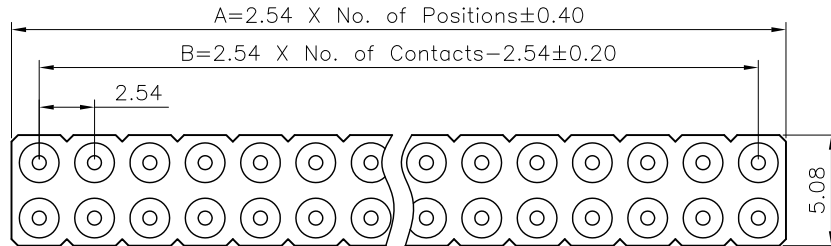

P.C.B LAYOUT

Technical Data

Material:
Pin: Brass,machined CuZn38Pb2
Plating:
Tin plated:2µm/80µ"Ni, 5µm/200µ"Sn
Gold Plated:2µm/80µ"Ni,Full gold
Insulator(black): Black (PPS) UL94V-0

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥5000MΩ at V=500V
Dielectric Withstanding Voltage: 1000V AC Min
Operaing voltage: 60VAC/DC

Mechanical:
Operaing temperatures: Gold Plsted:-55°C to+125°C
Tin plated:-40°C to+105°C
Soldering temperature: +260°C,10s max.

PA

D	XXX	2	7	F	X	00	1100A	0	00
Angel Options D 180°直插 R 90°折弯 S SMT H 卧式插接 A 单排SMT 第1Pin朝下 B 单排SMT 第1Pin朝上	No. of Positions XXX Positions	Dip Spacing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm A 2.00mm S Special	Insulator Height 0 No 1 1.20 mm 2 1.90 mm 3 2.00 mm 4 2.10 mm 5 2.20 mm 6 2.80 mm 7 3.00 mm 8 3.80 mm 9 4.10 mm A 4.20 mm B 7.00 mm S Special	Insulator type A PBT单排 B PBT双排 C PBT中空 D PBT非框 E PPS单排 F PPS双排 G PPS中空 H PPS非框 I PA46单排 J PA46双排 K PA46三排 L PA66单排 M LCP四排	Pin Plated 0 No 1 Tin120µ" 锡 2 Tin200µ" 锡 3 Gold60.4µ" 金 4 Gold80.8µ" 金 5 Gold1µ" 金 6 Gold1.5µ" 金 7 Gold2µ" 金 8 Gold3µ" 金 9 Gold5µ" 金 A Gold8µ" 金 B Gold10µ" 金 C Gold15µ" 金 D Gold30µ" 金 E Ag plated F Nickel80µ"	Clip plated 00 No 1 Tin120µ" 锡 2 Tin200µ" 锡 3 Gold60.4µ" 金 4 Gold80.8µ" 金 5 Gold1µ" 金 6 Gold1.5µ" 金 7 Gold2µ" 金 8 Gold3µ" 金 9 Gold5µ" 金 A Gold8µ" 金 B Gold10µ" 金 C Gold15µ" 金 D Gold30µ" 金 E Ag plated F Nickel80µ"	Pin length(mm) 1100A 11.0mm S Special	Insulator Option 0 No	Series 00 No

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE : 2010-04-07	2.54mmPitch SIP Sockets Straight Double Row Pin Length 11.0mm
X.XXX ±0.10	DRAWN : LiKui	PART NO: PADXXX27FX001100A000
X.XX ±0.20	CHECKED :	DRAWING NO: EP-PAD-104
X.X ±0.30	APPROVED :	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50		