
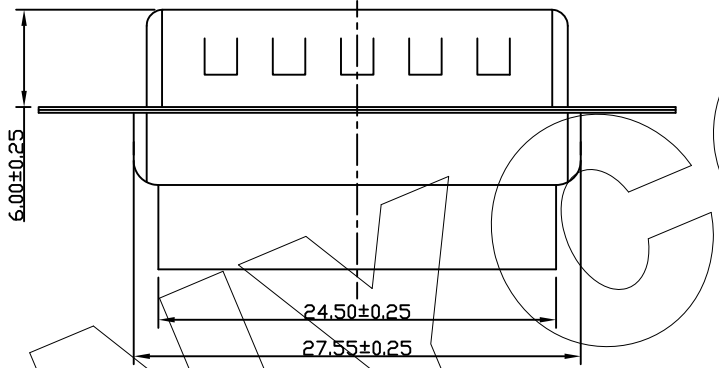
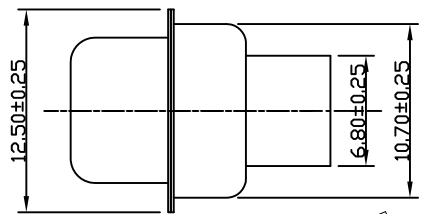


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-4-25

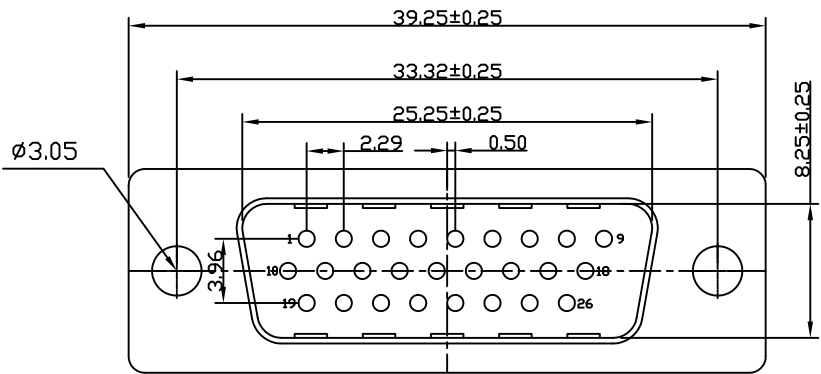

备注:

1. 性能:

- 额定电压 : 250V
- 额定电流 : 3AMP
- 接触阻抗 : 30mΩ MAX.
- 绝缘阻抗 : 1000MΩ MIN. at 500V DC
- 耐电压 : 500V Per minute
- 温度范围 : -55℃~105℃

2. 材质:

- 胶芯 : 主体PBT+30% G.F (UL94V-0)
后盖PA9T
- 铁壳 : SPCC 前壳电镀镍、后壳电
镀锡
- 弹片 : 不锈钢

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE ANGLE ±5° X.XXX ±0.10 X.XX ±0.20 X.X ±0.30 X. ±0.50	PROJECTON		TITLE: HDEC 26公铆合		
	DATE :	2016-4-25	PART NO:		
	DRAWN :	zhang	DRAWING NO:		
	CHECKED :		REV: A0	UNIT: mm	SCALE: 1:1
APPROVED :					