
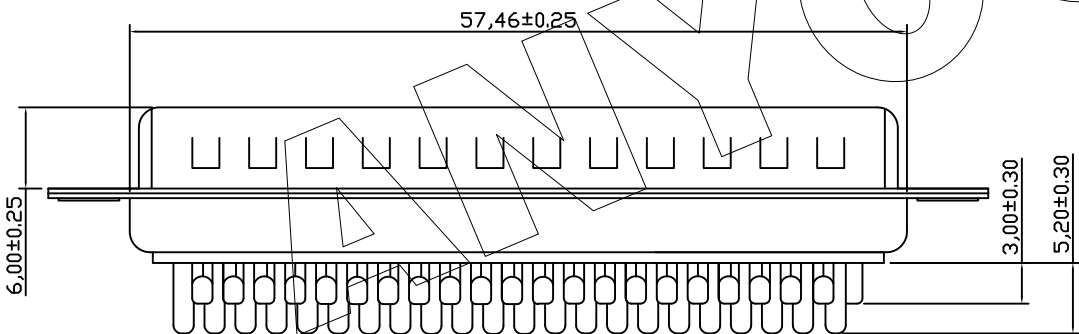
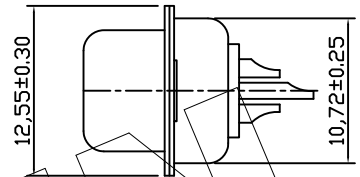


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-4-25

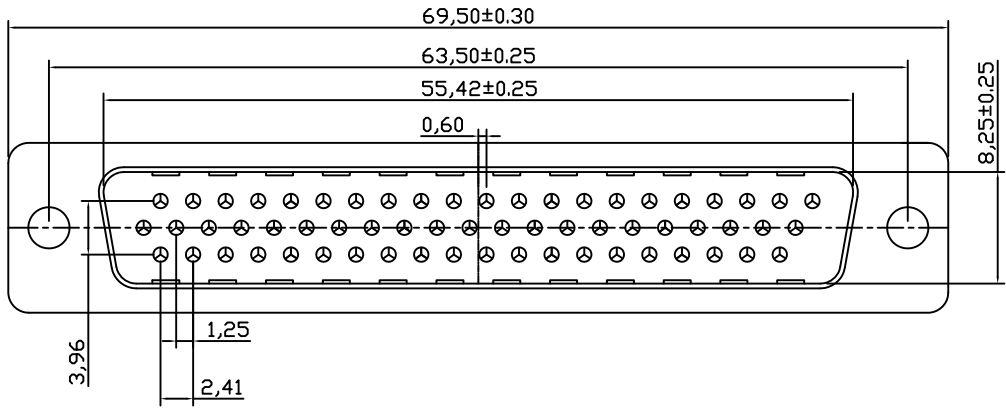

备注:
1.性能:

- 额定电压: 250V
- 额定电流: 3AMP
- 接触阻抗: 30mΩ MAX.
- 绝缘阻抗: 1000MΩ MIN. at 500V DC
- 耐电压: 500V Per minute
- 温度范围: -55° C~105° C

2.材质:

- 胶芯: PBT+30% G. F(UL94V-0) 黑色
- 端子: 黄铜, 镀镍底30u" Min. 接触部镀金0.8u". 焊接部镀亮锡80u" Min.
- 铁壳: SPCC, 前壳镀铜底50U' 镍80u"Min. 后壳铜底50U"、表面镀锡80U"MIN;

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE ANGLE ±5° X.XXX ±0.10 X.XX ±0.20 X.X ±0.30 X. ±0.50	PROJECTON		TITLE: HDB 62M传统焊线			
	DATE:	2016-4-25	PART NO:			
	DRAWN:	zhang	DRAWING NO:			
	CHECKED:		REV: A0	UNIT: mm	SCALE: 1:1	SIZE: A4
APPROVED:						