


4 3 2 1

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-5-26

D
C
B
A

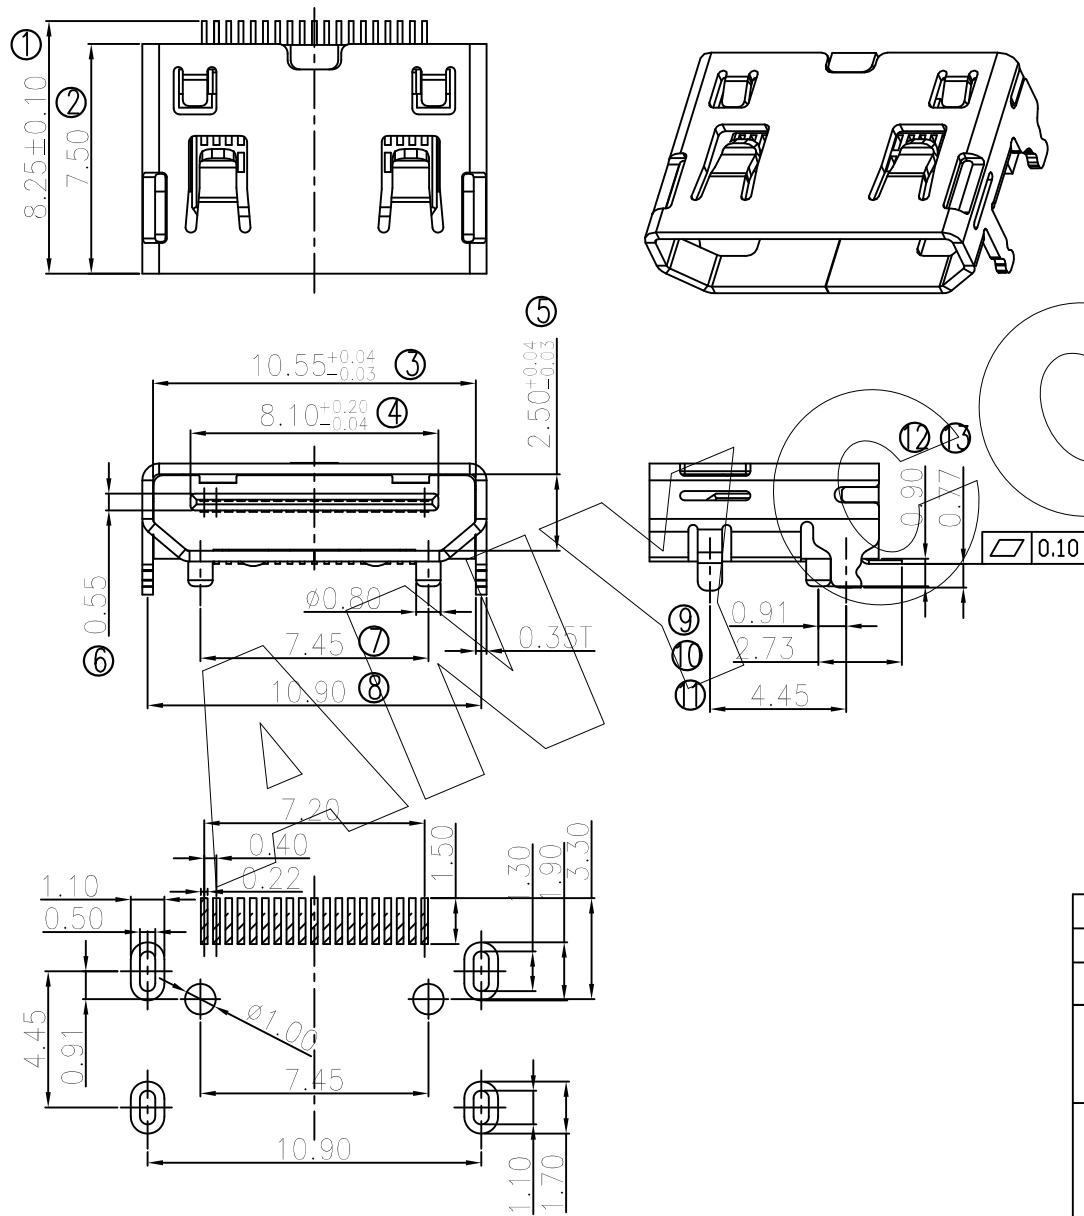

NOTES:

- 1.) MATERIAL:
 - 1-1. HOUSING: LCP, UL 94V-0, COLOR: BLACK;
 - 1-2. CONTACT: COPPER ALLOY T=0.12;
 - 1-3. SHELL: COPPER ALLOY T=0.35;
- 2.) FINISH:
 - 2-1. CONTACT: Au PLATING ON CONTACT AREA, (SEE P/N DESCRIBING) MATTE PURE Sn 100u" Min. PLATING ON SOLDER TAILS, 50u" MIN. Ni UNDERPLATING OVERALL;
 - 2-2. SHELL: PLATING AU 1u Min
- 3.) SPECIFICATIONS:
 - 3-1. VOLTAGE RATING: 40V
 - 3-2. CURRENT RATING: 0.5A
 - 3-3. INSULATION RESISTANCE: 100MEG.OHM MIN
 - 3-4. CONTACT RESISTANCE: 30MILL.OHM MAX
 - 3-5. OPERATION TEMPERATURE: -20° TO +85°
 - 3-6. INSERT FORCE: 44.1N MAX
 - 3-7. EXTRACT FORCE: 9.8~44.1N
 - 3-8. DURABILITY: 10000 CYCLES
- 4.) 标示○为重点管控尺寸。

③	SHELL	C2680-H T=0.35mm	PLATING AU 1u Min PLATING NI 30~80u" over all	——
②	CONTACT	C5191-H T=0.12mm	CONTACT AREA: 1u" AU SOLDER AREA: 100u" TIN MIN	——
①	HOUSING	HIGH TEMPERATURE THERMOPLASTICS	UL 94V-0	BLACK

ANYCONN® 东莞市恩康电子有限公司
www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE:	HDMI C TYPE母座SMT贴板		
ANGLE ±5°	DATE :	2016-5-26	PART NO:			
X.XXX ±0.10	DRAWN :	ZHANG	DRAWING NO:			
X.XX ±0.20	CHECKED :		REV:	A0	UNIT:	mm
X.X ±0.30	APPROVED :		SCALE:	3:1	SIZE:	A4
X. ±0.50						

4 3 2 1