
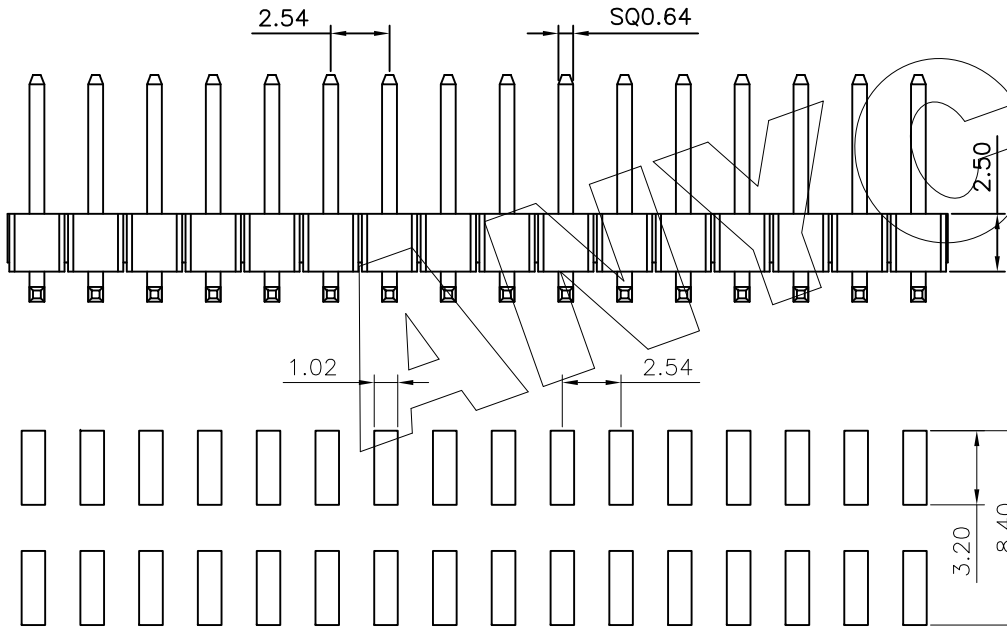


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2008-12-06

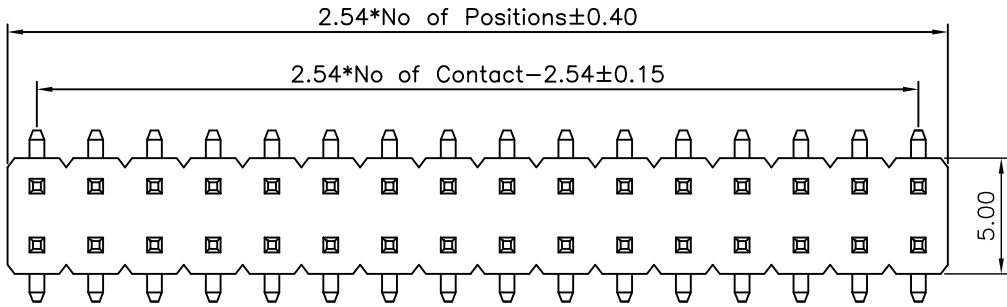


P.C.B LAYOUT

Technical Data

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA-6T+30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10s max.

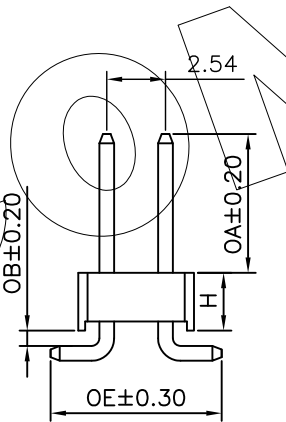

P120	12	XXX	XX	S	X	X	N	S002
Product Descriptions P120 H=2.54	Product Type 12 Dual Row	No. of Positions XXX Poles	Pin Plating G0 Gold Flash SN Tin Plated	Angle options S SMT	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm) L=11.6mm

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: 2.54mm Pin Header Double Row SMT Length 11.6 mm
ANGLE ±5°	DATE :	2008-12-06	
X.XXX ±0.10	DRAWN :	Fuqianshan	PART NO: P12012XXXXXXNS002
X.XX ±0.20	CHECKED :		DRAWING NO:P12012XXXXXXNS002
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			