

4




3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2009-10-12

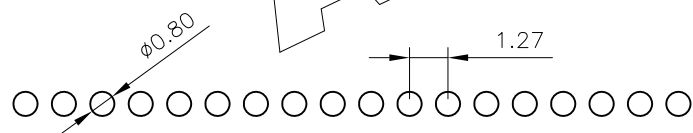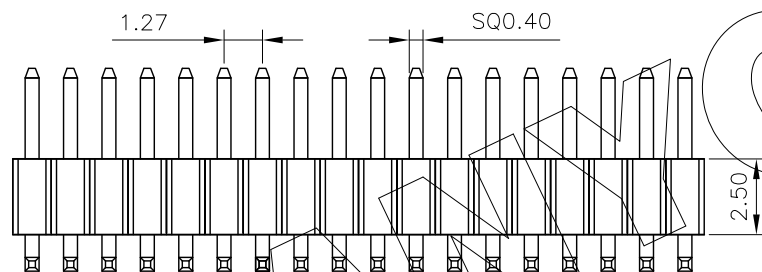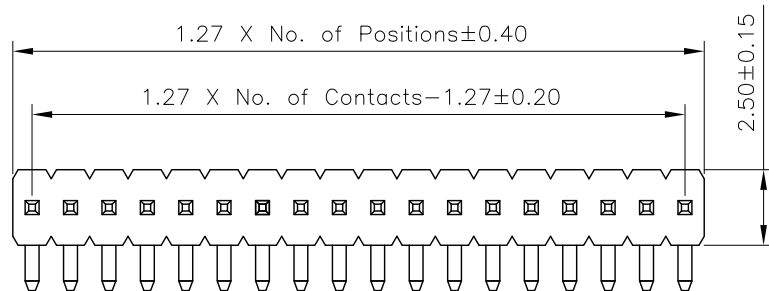

PCB LAYOUT

Technical Data

Material:
 Contact Material: Brass
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:
 Current rating: 1.0Amps/contact max.
 Contact resistance: $\leq 20\text{m}\Omega$ /contact
 Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to $+105^{\circ}\text{C}$
 Tin plated: -40°C to $+105^{\circ}\text{C}$
 Soldering temperature: $+260^{\circ}\text{C}$, 10s max.

P115

11

XXX

XX

R

X

B

N

RXXX

Product Descriptions
P115 H=2.5

Product Type
11 Single Row

No. of Positions
XXX Poles

Pin Plating
G0 Gold Flash
G1 1u" Au
SN Tin plated

Angle options
R Ringht Angle

Insulator Material
A PBT
B PA66
C PA6T
D LCP

Color
B Black

Pin length(mm)
L=8.95mm

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE $\pm 5^{\circ}$	DATE :	2009-10-12	PH1.27 H2.50mm Single Row Right Angle L8.95mm Pin Header
X.XXX ± 0.10	DRAWN :	Yangyi	PART NO: P11511XXXXXRBCBNRXXX
X.XX ± 0.20	CHECKED :		DRAWING NO:
X.X ± 0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ± 0.50			

4

3

2

1