


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-06-14

Technical Data

Material:
 Contact Material: Brass
 Contact plating: See the part NO.
 Insulator Material: Black Polyester UL94V-0
 Standard: See the part NO.

Electrical:
 Current rating: 1.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10s max.

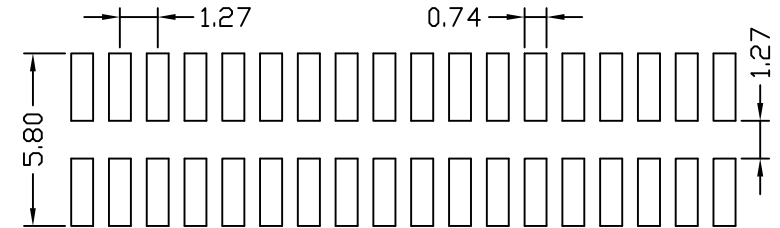

P.C.B LAYOUT

P114	22	XXX	XX	S	X	X	N	SXXX
Product Descriptions P114 H=2.0	Product Type 22 Double row Dual Base	No. of Positions XXX Poles	Pin Plating G0 Gold Flash G1 1u" Au SN Tin Plated	Angle options S SMT	Insulator Material A PBT+G/F30% B PA66+G/F30% C PA6T+G/F30% D LCP+G/F30%	Color B Black W White L Blue G Green Y Yellow R Red N Natural	N 无柱	Pin length(mm) L=14.76mm

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE: PH1.27 H2.0mm Pin Header Double Row Dual Base S.M.T Type
ANGLE ±5°	DATE :	2012-06-14	PART NO: P11422XXXXXXNSXXX
X.XXX ±0.10	DRAWN :	Sammo	DRAWING NO:EP-P11422-005
X.XX ±0.20	CHECKED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X.X ±0.30	APPROVED :		
X. ±0.50			