

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-02-27

Technical Data

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT or PA6T +30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 1000V AC/minute




Mechanical:

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +220°C max(PBT),

+260°C max(PA6T).

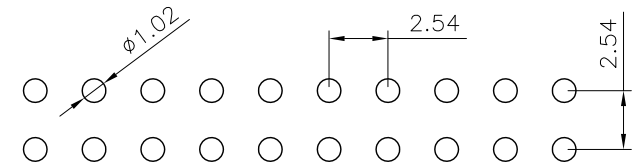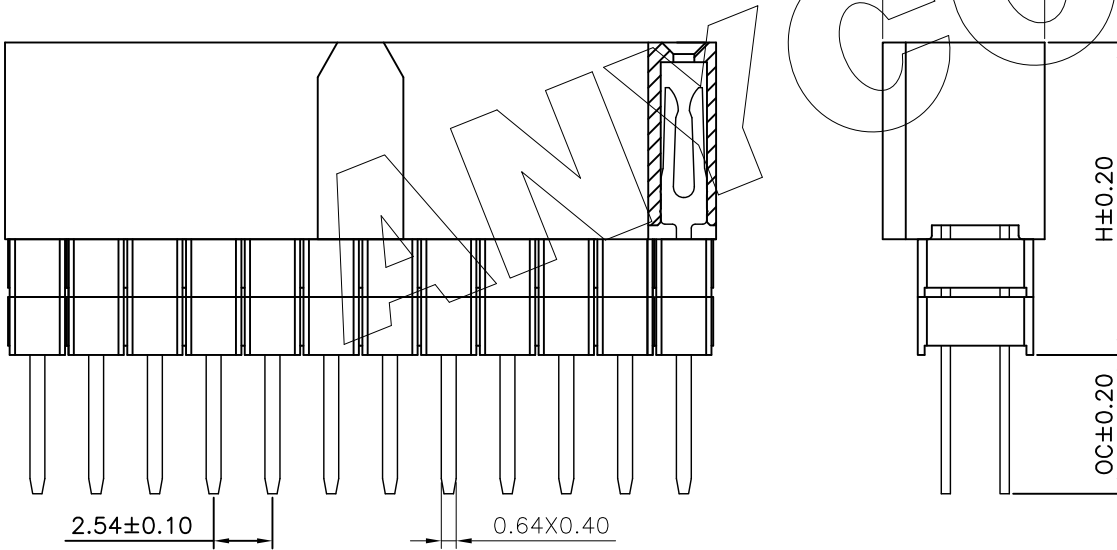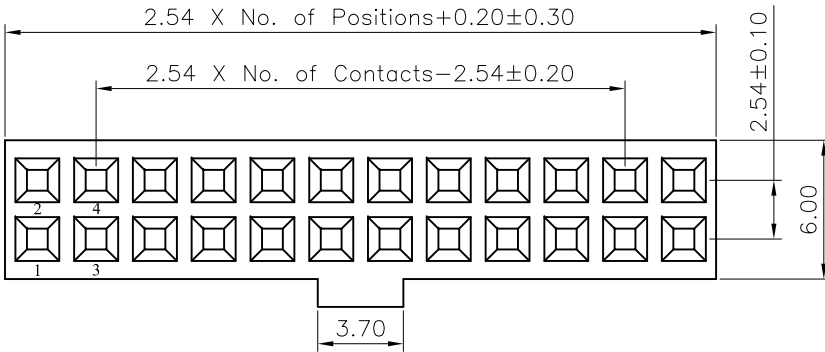

P.C.B LAYOUT

F139	32	XXX	XX	D	X	X	Q	B	00
Product Descriptions F139 H=8.5	Product Type 22 Dual Row Three Base	No. of Positions XXX Poles	Pln Plating G0 Gold Flash SN Tin Plated	Angle options D Straight	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural	Series NO.		

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE ANGLE ±5° X.XXX ±0.10 X.XX ±0.20 X.X ±0.30 X. ±0.50	PROJECTON		TITLE: PH2.54 H8.50mm Double Row Straight Female Header
	DATE :	2012-02-27	PART NO: F13932XXXXDXXQB00
	DRAWN :	Sammo	DRAWING NO:
	CHECKED :		REV: A0
APPROVED :		UNIT: mm	SCALE: 3:1
			SIZE: A4