
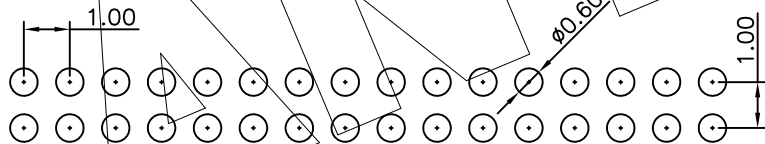
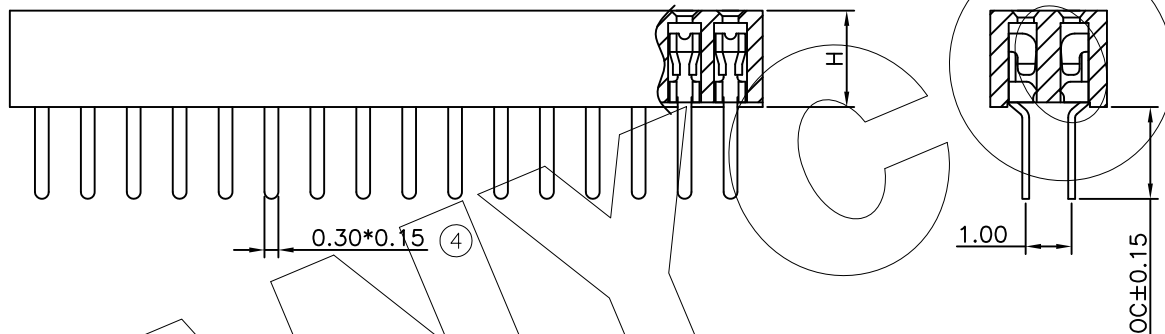


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-10-21

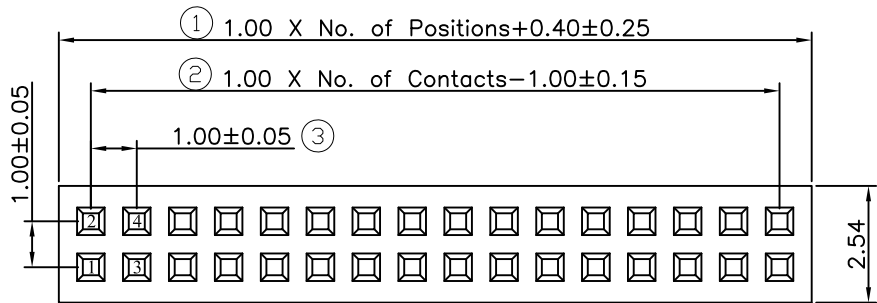

PCB LAYOUT

Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:
 Current rating: 1.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10s max.

F112	12	XXX	XX	D	C	X	N	A	00
Product Descriptions F112 H=2.10	Product Type 12 Dual Row	No. of Positions XXX Poles	Pln Plating G0 Gold Flash SN Tin Plated	Angle options D Dip	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Series NO.	

ANYCONN® 东莞市恩康电子有限公司			
www.enkcom.com		DONGGUAN ANYCONN ELECTRONICS CO.,LTD	
TOLERANCE	PROJECTON		TITLE: 1.00mm Female Header Dual Row Straight H=2.10
ANGLE ±5°	DATE :	2012-10-21	PART NO: F11212XXXXXSCBNA00
X.XXX ±0.05	DRAWN :	Zhang	DRAWING NO: EP-F11212-001
X.XX ±0.10	CHECKED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X.X ±0.15	APPROVED :		
X. ±0.25			