

4



3

2



1

REVISION DATA


REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-06-04

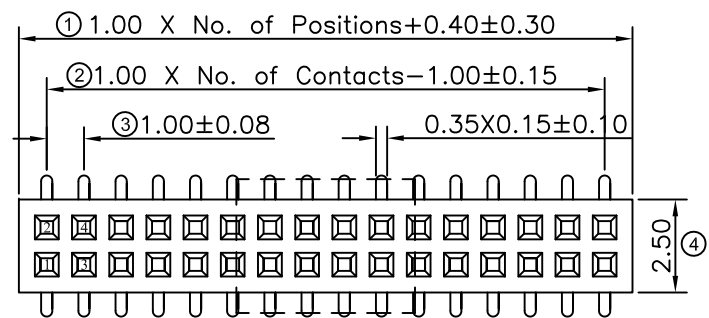

无柱

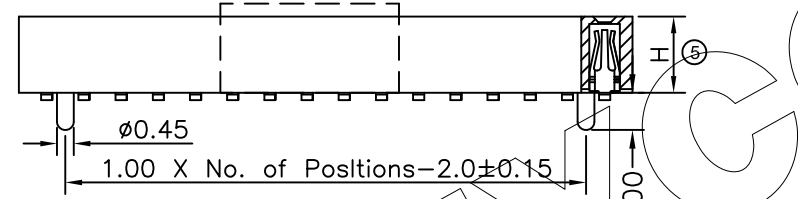

有柱

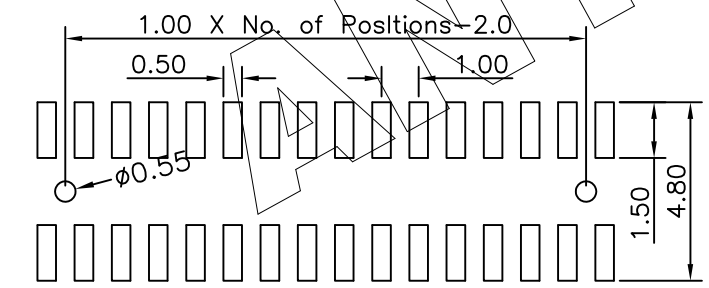

PCB Layout

# Technical Data

Material:  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over 50µ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PA6T+30%G.F

Electrical:  
 Current rating: 0.75Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 300V AC/minute

Mechanical:  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +260°C, 10s max.

F112	12	XXX	XX	S	C	B	X	A	0P
Product Descriptions F112 H=2.1	Product Type 12 Dual Row	No. of Positions XXX Poles	Pin Plating G1 Gold 1u" SN Tin Plated S1 半金锡1u"	Angle options S SMT	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black	N No W with Peg	Series NO. A OE=3.80mm	

**ANYCONN® 东莞市恩康电子有限公司**  
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: PH1.0 H2.1 Dual Row SMT Female Header
ANGLE ±5°	DATE :	2010-06-04	PART NO: F11212XXXXXSCBXA00
X.XXX ±0.10	DRAWN :	Fuqianshan	
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			

4

3

2

1