




REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-10-05

### Technical Data

Material:  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PBT+30%G.F

Electrical:  
 Current rating: 3.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 1000V AC/minute

Mechanical:  
 Mechanical life cycle: min.200  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +220°C, 10s max.

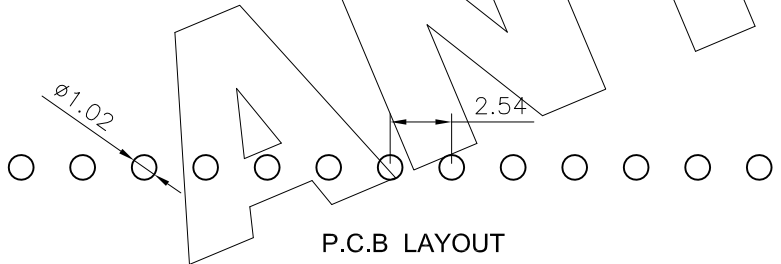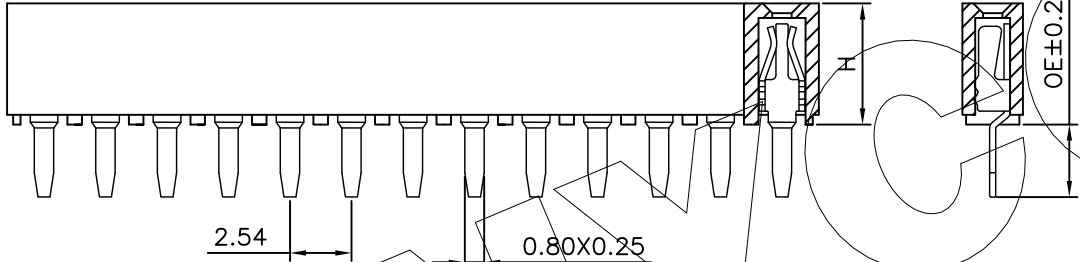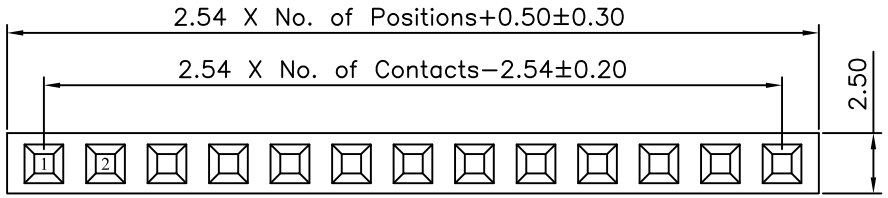

F128	11	XXX	XX	D	X	B	N	A	00
Product Descriptions F128 H=5.0	Product Type 11 Single row	No. of Positions XXX Poles	Pln Plating G1 Gold 1u" SN Tin Plated	Angle options D Straight	Insulator Material A PBT B PA66 C PA6T	Color B Black		Series NO. A OC=3.00mm	

<b>ANYCONN® 东莞市恩康电子有限公司</b>			
www.enkcom.com		<b>DONGGUAN ANYCONN ELECTRONICS CO.,LTD</b>	
TOLERANCE	PROJECTON		TITLE: Pitch 2.54 H5.0mm Single Row Straight Female Header
ANGLE ±5°	DATE :	2010-10-05	PART NO: F12811XXXXDXXNA00
X.XXX ±0.10	DRAWN :	James	DRAWING NO:
X.XX ±0.20	CHECKED :		REV: A0
X.X ±0.30	APPROVED :		UNIT: mm
X. ±0.50			SCALE: 3:1
			SIZE: A4