


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-5-19

Specifications(规格):  
Voltage rating(额定电压): 60V AC / DC  
Current rating(额定电流): 9A AC / DC  
Withstanding voltage(耐压值): 1500V AC/minute  
Temperature range(工作温度): -25°C~+85°C  
Insulation resistance(绝缘电阻): 1000mΩ Min  
Contact resistance(接触电阻): 10mΩ Max  
After environmental testing(环境测试后): 20mΩ Max  
Pin Material: Brass/Tin-Plated  
Material: Nylon 66, UL94V-2  
Color: Natural

Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	---	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

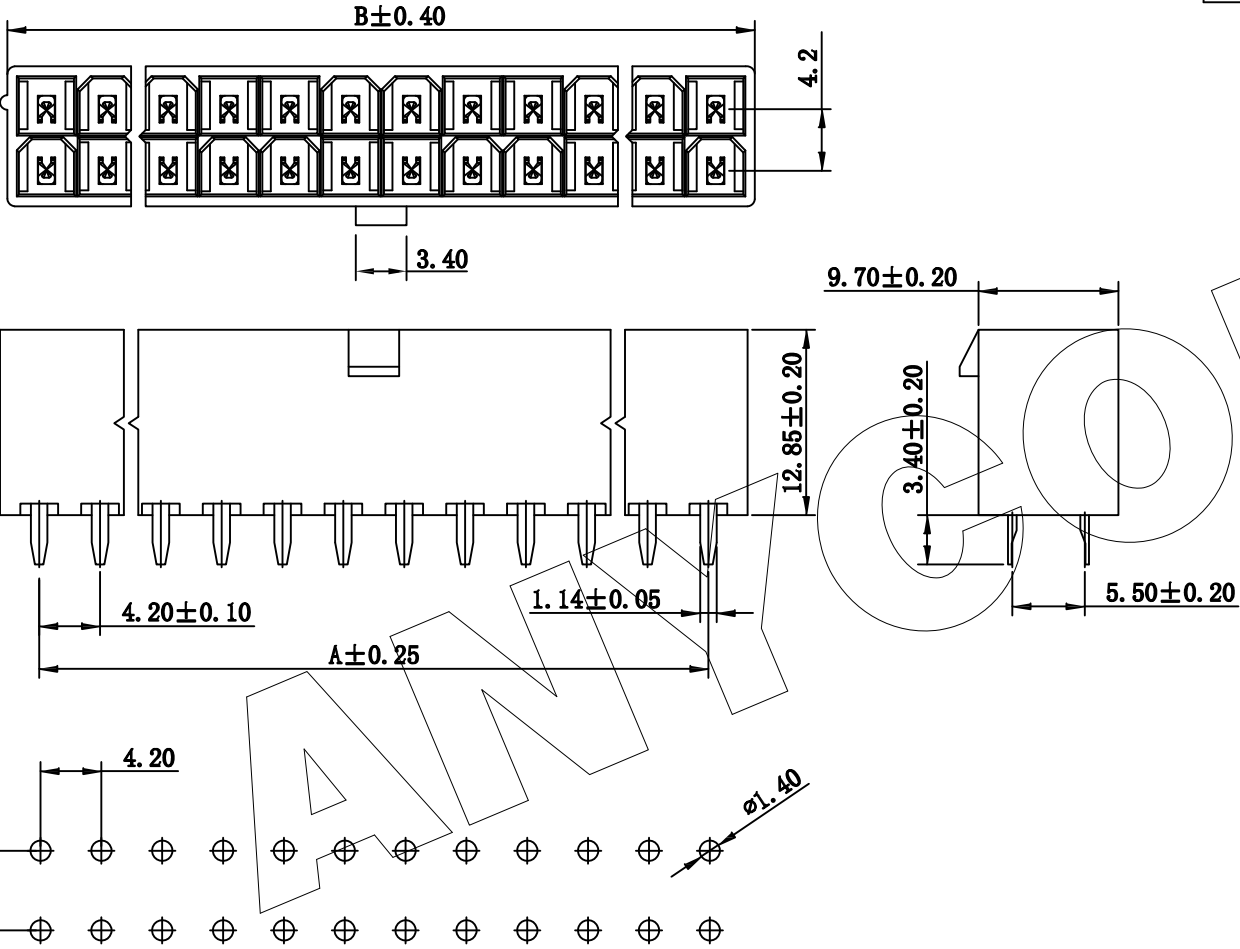

P. C. B LAYOUT

<b>WF</b>	J	D	12	XXX	XX	X	N	DXXX
Pitch J PH4.20	D 180°	XX Positions	XXX Positions	G0 Gold Flash SN Tin Plated	Insulator Material A PBT B PA66 C PA6T P PC F PA9T	W With peg N NO Peg L With lock T Fixed tabs		NXXX

**ANYCONN®** 东莞市恩康电子有限公司  
www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON	TITLE:
ANGLE $\pm 5^\circ$	DATE: 2016-5-19	4.2mm Crimp Style connectors
X.XXX $\pm 0.10$	DRAWN: ZHANG	PART NO: WFJD12XXXXXXNDXXX
X.XX $\pm 0.20$	CHECKED:	DRAWING NO: C4255WVK-2NP-N2NA
X.X $\pm 0.30$	APPROVED:	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. $\pm 0.50$		