
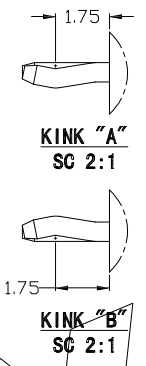
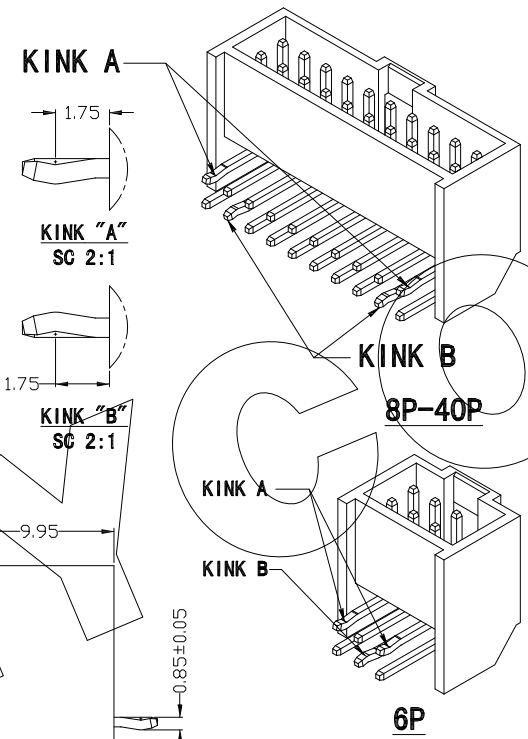
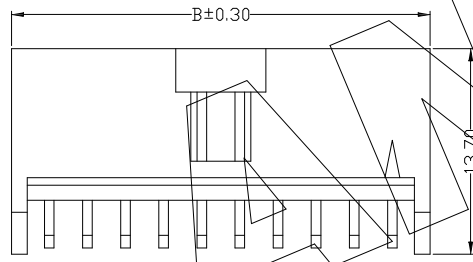
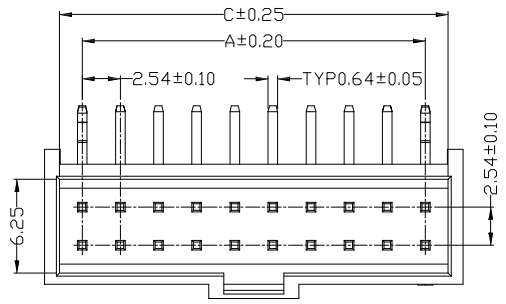


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-5-26

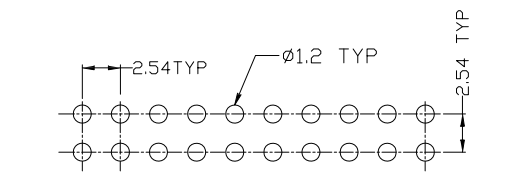

Specifications
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C~+85°C
 Contact Resistance: 20mΩ Max.
 Pin Material: Brass/Gold-flash or Tin-plated
 Material: PBT, UL94V-0
 Q'ty/Bag: 1000PCS

Poles	Dimensions (mm)	
	A	B
6	5.08	10.20
8	7.62	12.70
10	10.16	15.20
12	12.70	17.80
14	15.24	20.30
16	17.78	22.90
18	20.32	25.40
20	22.86	27.90
22	25.40	30.50
24	27.94	33.00
26	30.48	35.60
28	33.02	38.10
30	35.56	40.60
32	38.10	43.20
34	40.64	45.70
36	43.18	48.30
38	45.72	50.80
40	48.26	53.30

DIM C
2.50mm
2.90mm

WF	E	R	12	XXX	XX	X	N	RXX3
Pitch E PH2.54	R 90°	XX Positions	XXX Positions	G0 Gold Flash SN Tin Plated	Insulator Material A PBT B PA66 C PA6T P PC F PA9T	W With peg N NO Peg L With lock T Fixed tabs		RXX3

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2016-5-26	2.54mm Crimp Style connectors
X.XXX ±0.10	DRAWN :	ZHANG	PART NO: WFER12XXXXXXNRXX3
X.XX ±0.20	CHECKED :		DRAWING NO: A2541WRA-2NP-P0BKTX
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			